
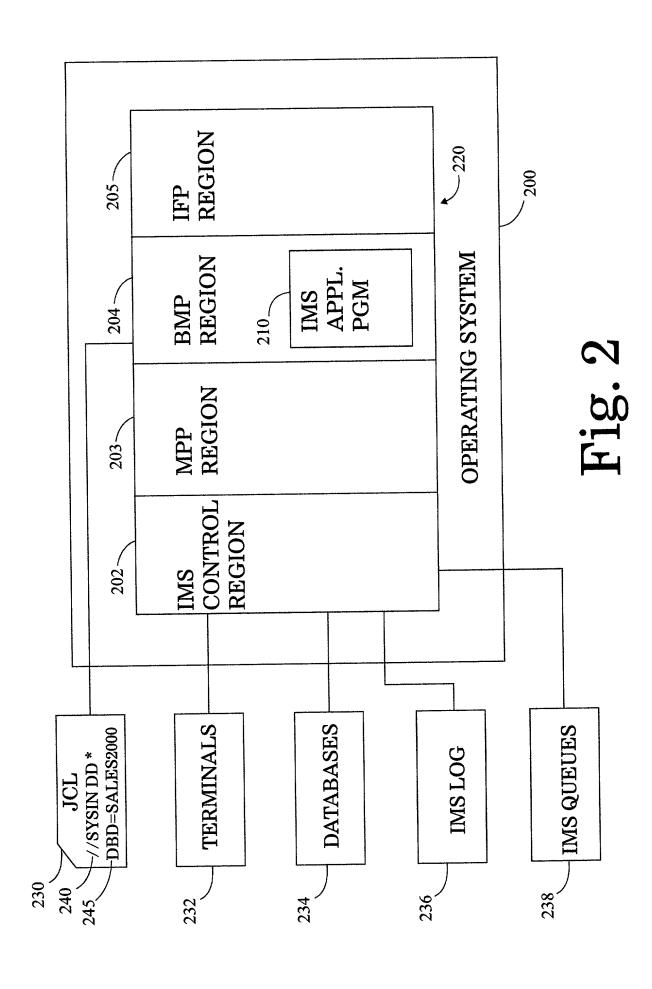
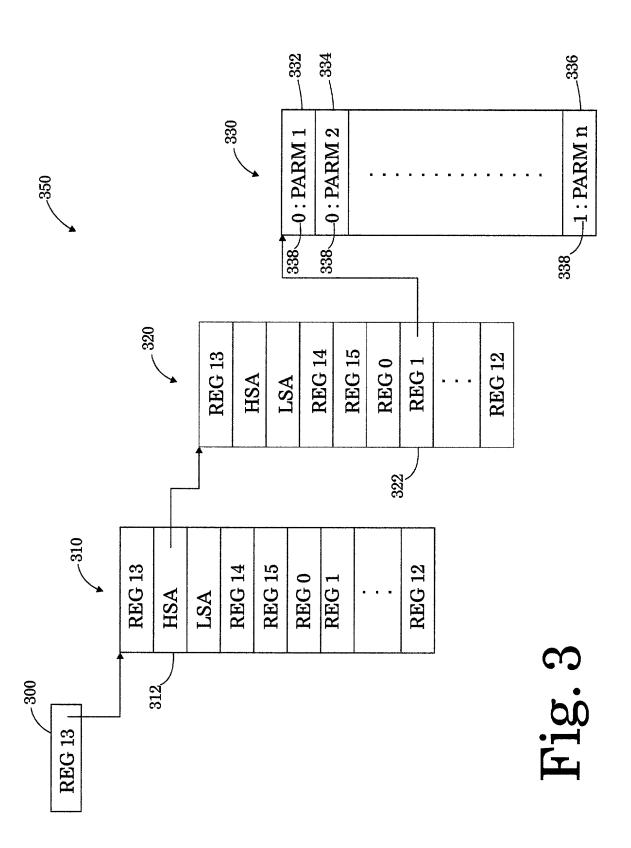



Fig. 1

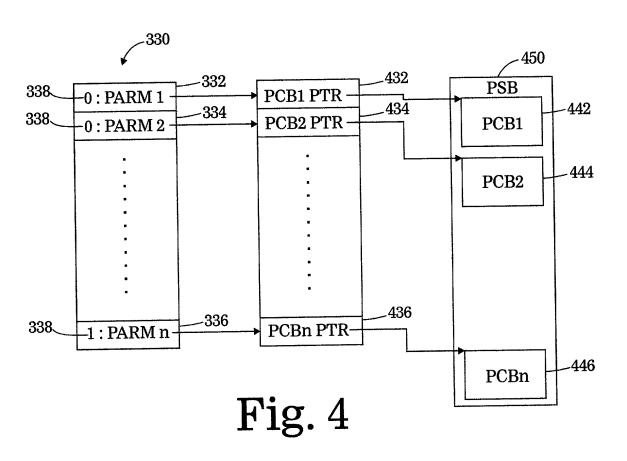

4 .





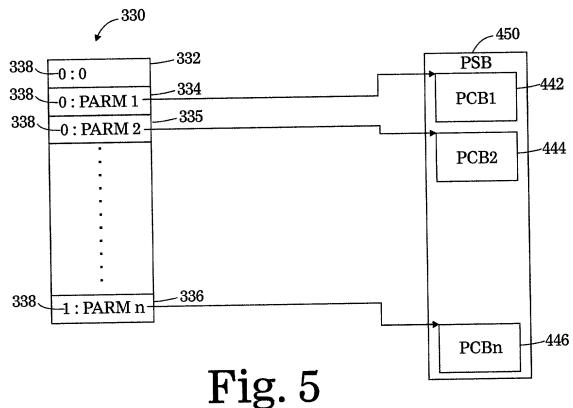

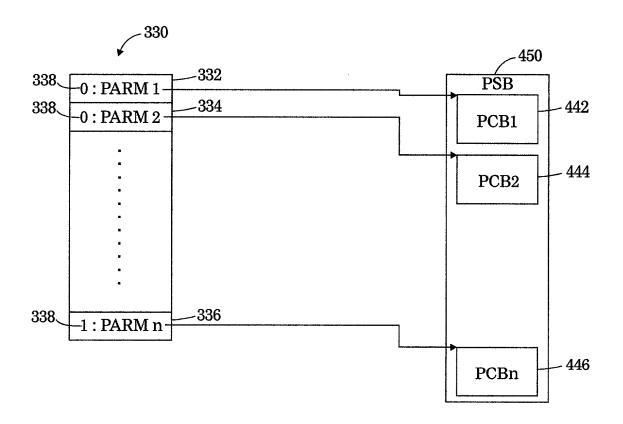


Fig. 6

_ 550

DCL DBPTR POINTER; DCL 1 DBPCB BASED(DBPTR),


	•
⁵⁰² —2 NAME	CHAR(8),
2 SEGLEVEL	CHAR(2),
2 STAT	CHAR(2),
2 PROCOPT	CHAR(4),
2 RESERV	BIN(31),
2 SEGNAME	CHAR(8),
$2\mathrm{KFB_LEN}$	BIN(31),
2 SENSEG	BIN(31),
2 KEYFBA	CHAR(255);

Fig. 7

DCL IOPTR POINTER; DCL 1 IOPCB BASED(IOPTR),

DOD 1101 02 211022 (= 0 = = = 5)		
552	-2 NAME	CHAR(8),
	2 RESV	BIN(15),
	2 STAT	CHAR(2),
554	$2 \mathrm{LDTE}$	CHAR(8),
	2 PREFIX	BIN(31),
	2 MODN	CHAR(8),
	─2 USER	CHAR(8),
	2 SENSEG	BIN(31),
	2 GROUP	CHAR(8);

Fig. 8

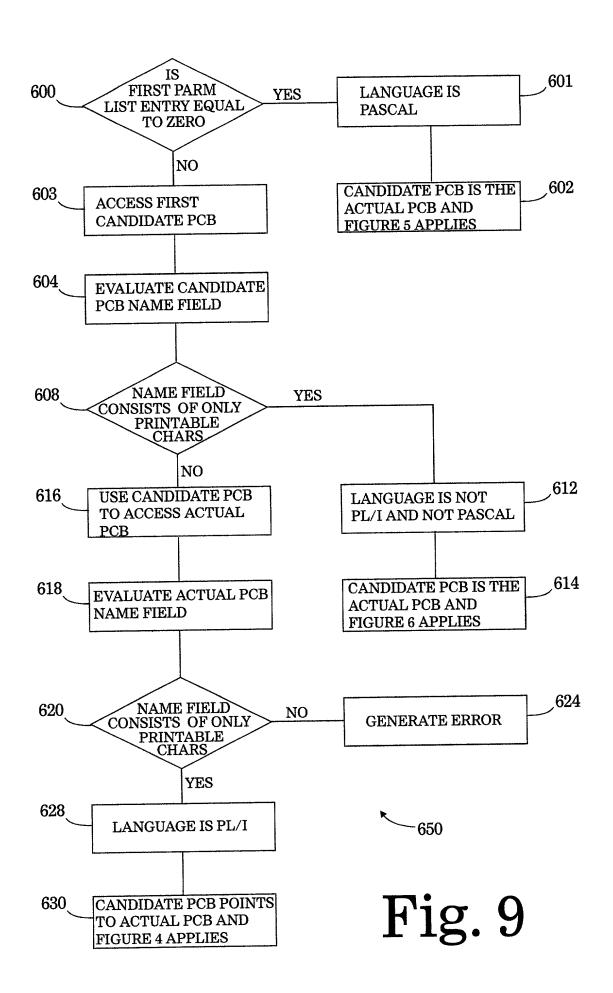

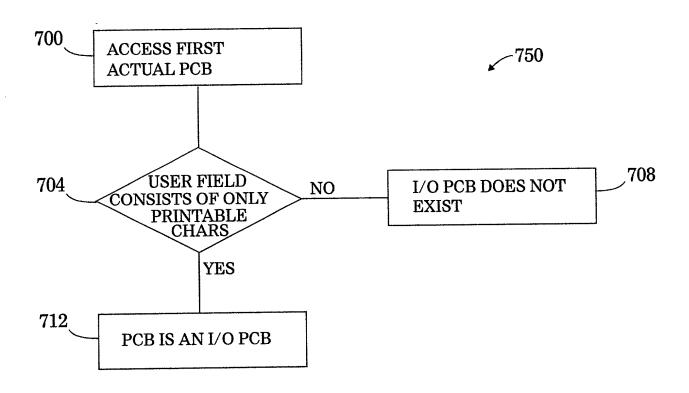


Fig. 10

* 0 *

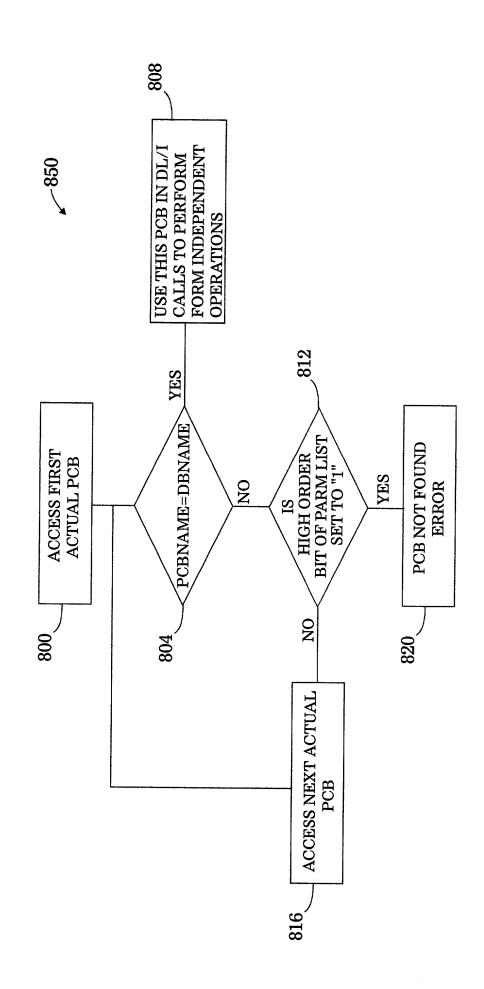


Fig. 11